


## **Step one:**

Follow user manual to pair the remote and your existing opener. It requires to activate the learn button.

1. Open the remote shell and **put in battery CR2032** (battery can not be shipped). Please use tool if you find it is hard to open the shell.
2. **Press and release the learn button** on the garage door opener, the learn LED will light.

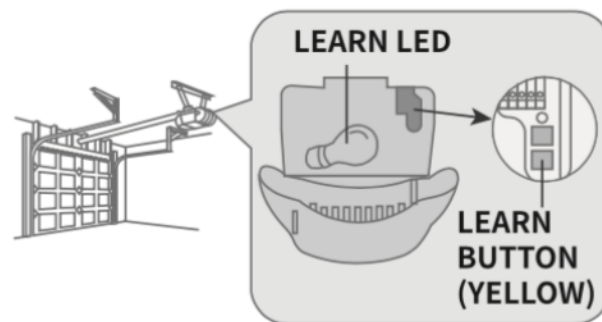

3. Within 30 seconds, **press and HOLD below remote control button(bottom right one)** until the garage door opener light flashes or clicks are heard to indicate successful programming.

**\*only this bottom right button will work, as it is connected to the wire.**



## **Step two**

If the remote is working with your opener, connect it with your Smart garage opener 'Signal Control Cable'. The wiring clip supplies easy connection. Then your smart garage door opener can control this remote button. That means your opener is compatible!

- Note: The wires connect to the bottom right button, so only this button is working with MSG100.

